UNCLASSIFIED

AD NUMBER
AD827769

LIMITATION CHANGES

TO:

Approved for public release; distribution is unlimited.

FROM:

Distribution authorized to U.S. Gov't. agencies and their contractors; Critical Technology; JAN 1968. Other requests shall be referred to Air Force Rome Air Development Center, EMATE, Griffiss AFB, NY. This document contains export-controlled technical data.

AUTHORITY

radc usaf ltr, 17 sep 1971

THIS PAGE IS UNCLASSIFIED

RADC-TR-68-71

STRIPLINE FERRITE DEVICES

Martin Sherman

Syrocuse University Research Corporation
Special Projects Laborotory

TECHNICAL REPORT NO. RADC-TR- 68-71
January 1968

Rome Air Development Center
Air Force Systems Command
Griffiss Air Force Base, New York

MAR 4 1968

DOCUMENT CONTROL DATA - R & D

(Security classification of title, body of abstract and indexing annotation must be entered when the overall report is classified)

1. ORIGINATING ACTIVITY (Corporate author)	2a. REPORT SECURITY CLASSIFICATION
Syracuse University Research Corporation Syracuse, New York	Unclassified
	2b. GROUP

3. REPORT TITLE

STRIPLINE FERRITE DEVICES

4. DESCRIPTIVE NOTES (Type of report and inclusive dates)

Interim Report

5. AUTHOR(S) (First name, middle initial, last name)

Martin Sherman

6. REPORT DATE	7a. TOTAL NO. OF PAGES	7b. NO. OF REFS
January 1968	14	0

8a. CONTRACT OR GRANT NO. F30602-67-C-0378	9a. ORIGINATOR'S REPORT NUMBER(S)
b. PROJECT NO. 9684	
c. Task No. ARPA Order 550	9b. OTHER REPORT NO(S) (Any other numbers that may be assigned this report)
d.	RADC-TR-68-71

10. DISTRIBUTION STATEMENT

This document is subject to special export controls and each transmittal to foreign governments, foreign nationals or representatives thereto may be made only with prior approval of RADC (EMATE) Griffiss AFB NY 13440.

11. SUPPLEMENTARY NOTES	12. SPONSORING MILITARY ACTIVITY
RADC Project Engineer (EMATE) P. A. Romanelli AC 315 330-4251	Rome Air Development Center Techniques Branch Griffiss Air Force Base, New York

13. ABSTRACT

This report describes the theory and experimental results obtained for an S-Band microstrip three-port ring circulator. Three meander line non-reciprocal phase shifters are tied together in a ring three tee-junctions. The circuit was deposited on a 20 mil thick ferrite disc. A switching wire runs through a hole in the center of the disc and the device is operated in a self-latching mode. The primary reasons for choosing this geometry were its low manufacturing cost and its compatibility with microwave integrated circuits.

The initial circulator that was designed has a 2 db insertion loss and a bandwidth of approximately 2%. Attempts were made to increase the bandwidth by varying various meander line phase shifter parameters. All the devices tested had band widths of approximately 2%.

An analysis of the device shows that it has a high Q caused by the large insertion phases (of the phase shifters) required to obtain the required amount of non-reciprocal phase shift. Holding currents or permanent magnets rather than latching operation could increase the bandwidth. It appears doubtful that bandwidths greater than 10% can be obtained from the ring circulator.

DD FORM 1473
1 NOV 65

KEY WORDS	LINK A		LINK B		LINK C	
	ROLE	WT	ROLE	WT	ROLE	WT
Circulator						
Phase Shifter						
Stripline						

Interim Report

Stripline Ferrite Devices

Contract No.   F 30602-67-C-0378

Prepared For

Air Force Systems Command
Research and Technology Division
Rome Air Development Center
Griffiss Air Force Base
Rome, New York 13440

and

Advanced Research Projects Agency
ARPA Order No. 550

January 31, 1968

Martin Sherman

Special Projects Laboratory
Syracuse University Research Corporation
P. O. Box 26, University Station
Syracuse, New York 13210

TABLE OF CONTENTS

LIST OF ILLUSTRATIONS

I. INTRODUCTION

This report describes the theory and experimental results obtained for an S-Band microstrip three-port ring circulator. Three meander line non-reciprocal phase shifters are tied together in a ring three tee-junctions. The circuit was deposited on a 20 mil thick ferrite disc. A switching wire runs through a hole in the center of the disc and the device is operated in a self-latching mode. The primary reasons for choosing this geometry were its low manufacturing cost and its compatiability with microwave integrated circuits.

The initial circulator that was designed has a 2 db insertion loss and a bandwidth of approximately 2 %. Attempts were made to increase the bandwidth by varying various meander line phase shifter parameters. All the devices tested had band widths of approximately 2%.

An analysis of the device shows that it has a high Q caused by the large insertion phases (of the phase shifters) required to obtain the required amount of non-reciprocal phase shift. Holding currents or permanent magnets rather than latching operation could increase the bandwidth. It appears doubtful that bandwidths greater than 10% can be obtained from the ring circulator.

2. RING CIRCULATOR ANALYSIS

2.1 Normal Mode Analysis

The scattering parameters of the ring circulator are related to the normal mode reflection coefficients by

$$S_{11} = \frac{1}{3}(s_1 + s_2 + s_3)$$

$$S_{21} = \frac{1}{3}(s_1 + e^{-j\gamma} s_2 + e^{+j\gamma} s_3)$$

$$S_{31} = \frac{1}{3}(s_1 + e^{+j\gamma} s_2 + e^{-j\gamma} s_3)$$

where

S_{11} is the circulator reflection coefficient

S_{21}, S_{31} are the circulator transmission coefficients

s_1 is the zero rotation $(1, 1, 1)$ normal mode reflection co-efficient

s_2 is the positive rotation $(1, e^{-j\gamma}, e^{+j\gamma})$ normal mode reflection coefficient

s_3 is the negative rotation $(1, e^{+j\gamma}, e^{-j\gamma})$ normal mode reflection coefficient

$\gamma = \frac{2\pi}{3}$

The ring circulator performance can be analyzed by finding its normal mode reflection coefficients.

A model for the three-port non-reciprocal ring circuit is shown in Figure 1. The ring circuit segments between the ports are non-reciprocal transmission lines. This is the limiting case of ideal non-reciprocal phase-shifters with perfect match and no loss. The parameters characterizing the circuit are indicated in the figure and are defined below:

Z_o: the characteristic impedance of each of the input ports to the ring

Z_+, Z_-:   the characteristic impedance of the ring in the clockwise and counter-clockwise directions, respectively
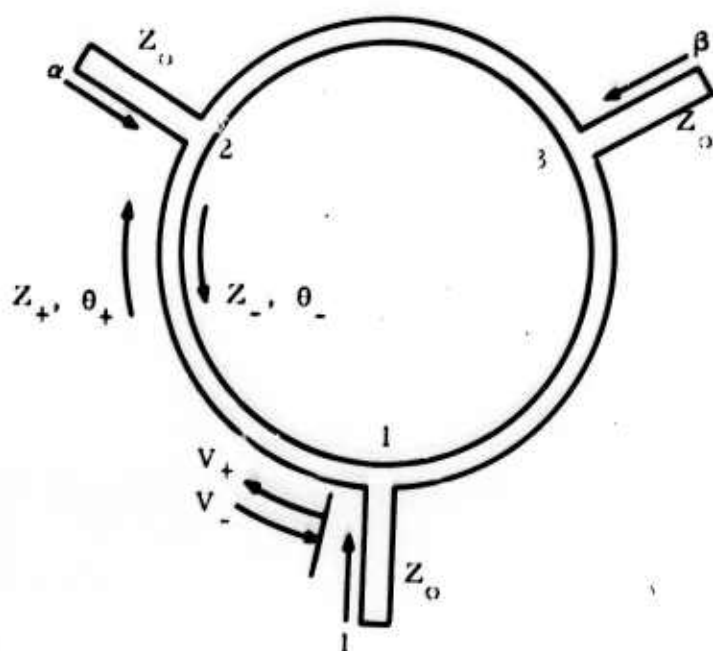
Figure 1.   Circuit for Determining Reflection Coefficients of the Three-Port Ring Circulator

3

θ_+, θ_-:   the insertion phase in the clockwise and counter-clockwise directions, respectively, between any two adjacent ports.

Referring again to Figure 1, the ring circuit is assumed excited by its normal modes. For the even zero rotation modes:

$$\alpha = \beta = 1$$

For the positive rotation mode:

$$\alpha = e^{-j\,2\pi/3} \qquad \beta = e^{+j\,2\pi/3}$$

For the negative rotation mode:

$$\alpha = e^{+j\,2\pi/3} \qquad \beta = e^{-j\,2\pi/3}$$

The total voltage V at port (1) is:

$$V = 1 + e^{j\phi} = V_+ + V_- \tag{2-1}$$

where

ϕ is the angle of the voltage reflection coefficient

V_+, V_- are the total travelling waves in the ring circuit in the clockwise and counter-clockwise direction, respectively, immediately to the left of port (1).

The symmetrical component reflection coefficients is of unit magnitude for the lossless circuit. We desire an expression for ϕ.

The total current I flowing into port (1) is:

$$I = \frac{1 - e^{j\phi}}{Z_o} = \frac{V_+}{Z_+} - \frac{V_-}{Z_-} - \beta \left(\frac{V_+}{Z_+} e^{-j\theta_+} + \frac{V_-}{Z_-} e^{+j\theta_-} \right) \tag{2-2}$$

The second term on the right side of this equation follows from the relationship between the device symmetry and the normal modes. It represents the current flowing into the junction from the ring segment to the right of the junction.

The voltage equation at port (2) is:

$$\alpha \left(1 + e^{j\phi} \right) = V_+ e^{-j\theta_+} + V_- e^{+j\theta_-} \tag{2-3}$$

4

Solving equations (I-1) and (I-3) yields:

$$V_+ = \frac{(1 + e^{j\phi})(\alpha - e^{+j\theta_-})}{(e^{-j\theta_+} - e^{+j\theta_-})}$$

$$V_- = \frac{(1 + e^{j\phi})(e^{-j\theta_+} - \alpha)}{(e^{-j\theta_+} - e^{+j\theta_-})}$$

(2-4)

It is convenient to express the insertion phase θ_+ and θ_- in terms of the average insertion phase θ and one-half the differential phase-shift ϵ :

$$\theta = \frac{\theta_- + \theta_+}{2}$$

$$\epsilon = \frac{\theta_- - \theta_+}{2}$$

or equivalently

$$\theta_- = \theta + \epsilon$$

$$\theta_+ = \theta - \epsilon$$

We also define

$$Z = 2 \frac{Z_+ Z_-}{Z_+ + Z_-}$$

Using these parameters and substituting equations (1-4) into equation (I-1) gives:

$$\phi = 2 \tan^{-1} \left\{ \frac{2Z_o}{Z} \left[\frac{\cos\theta - \frac{1}{2}(\alpha e^{-j\epsilon} + \beta e^{j\epsilon})}{\sin\theta} \right] \right\}$$

Inserting the values of α and β corresponding to the normal modes we finally obtain the expressions for the reflection coefficients. These are:

(1) Even Zero Rotation Mode

$$\phi_e = 2 \tan^{-1} \left\{ \frac{2Z_o}{Z} \left[\frac{\cos\theta - \cos\epsilon}{\sin\theta} \right] \right\}$$

5

(2) Positive Rotation Mode

$$\phi_+ = 2 \tan^{-1} \left\{ \frac{2 Z_o}{Z} \left[\frac{\cos \theta + \sin(30 + \epsilon)}{\sin \theta} \right] \right\}$$

(3) Negative Rotation Mode

$$\phi_- = 2 \tan^{-1} \left\{ \frac{2 Z_o}{Z} \left[\frac{\cos \theta + \sin(30 - \epsilon)}{\sin \theta} \right] \right\}$$

The reference planes for these reflection coefficients are at the three junctions of the ring and input ports.

The ring circulates when the three normal mode reflection coefficients are mutually separated by 120°. The three reflection coefficients are plotted in Figure 2 for a ring impedance Z_o of 50 ohms and a non-reciprocal phase shift 2ϵ of 60°. The abscissa is the average insertion phase of the non reciprocal phase shifter between the tee-junctions. For these values of impedance and phase shift the ring circulates when the average $\left(\frac{\theta_+ + \theta_-}{2} \right)$ electrical length of the phase shifter is an odd number of quarter wavelenghts.

2.2 Bandwidth

A formula for the bandwidth is obtained by taking the variation, about the circulation frequency, of the transmission coefficient to the isolated arm. For circulation in the 1-2-3-1 direction $s_2 = s_1 \exp(+j\,2\pi/3)$ and $s_3 = s_1 \exp(-j\,2\pi/3)$. The variation in isolation about the circulation frequency ω_o is

$$\delta S_{31} = \frac{1}{3} \frac{d}{d\omega} \left[s_1 + e^{j\gamma} s_2 + e^{-j\gamma} s_3 \right] \Bigg|_{\omega = \omega_o} \delta\omega$$

For $S_i = e^{j\phi_i}$ $i = 1, 2, 3$ (e, +, - modes)

$$\delta S_{31} = \frac{j}{3} \sum_{i=1}^{3} \frac{d\phi_i}{d\omega} \Bigg|_{\omega_o} \delta\omega$$
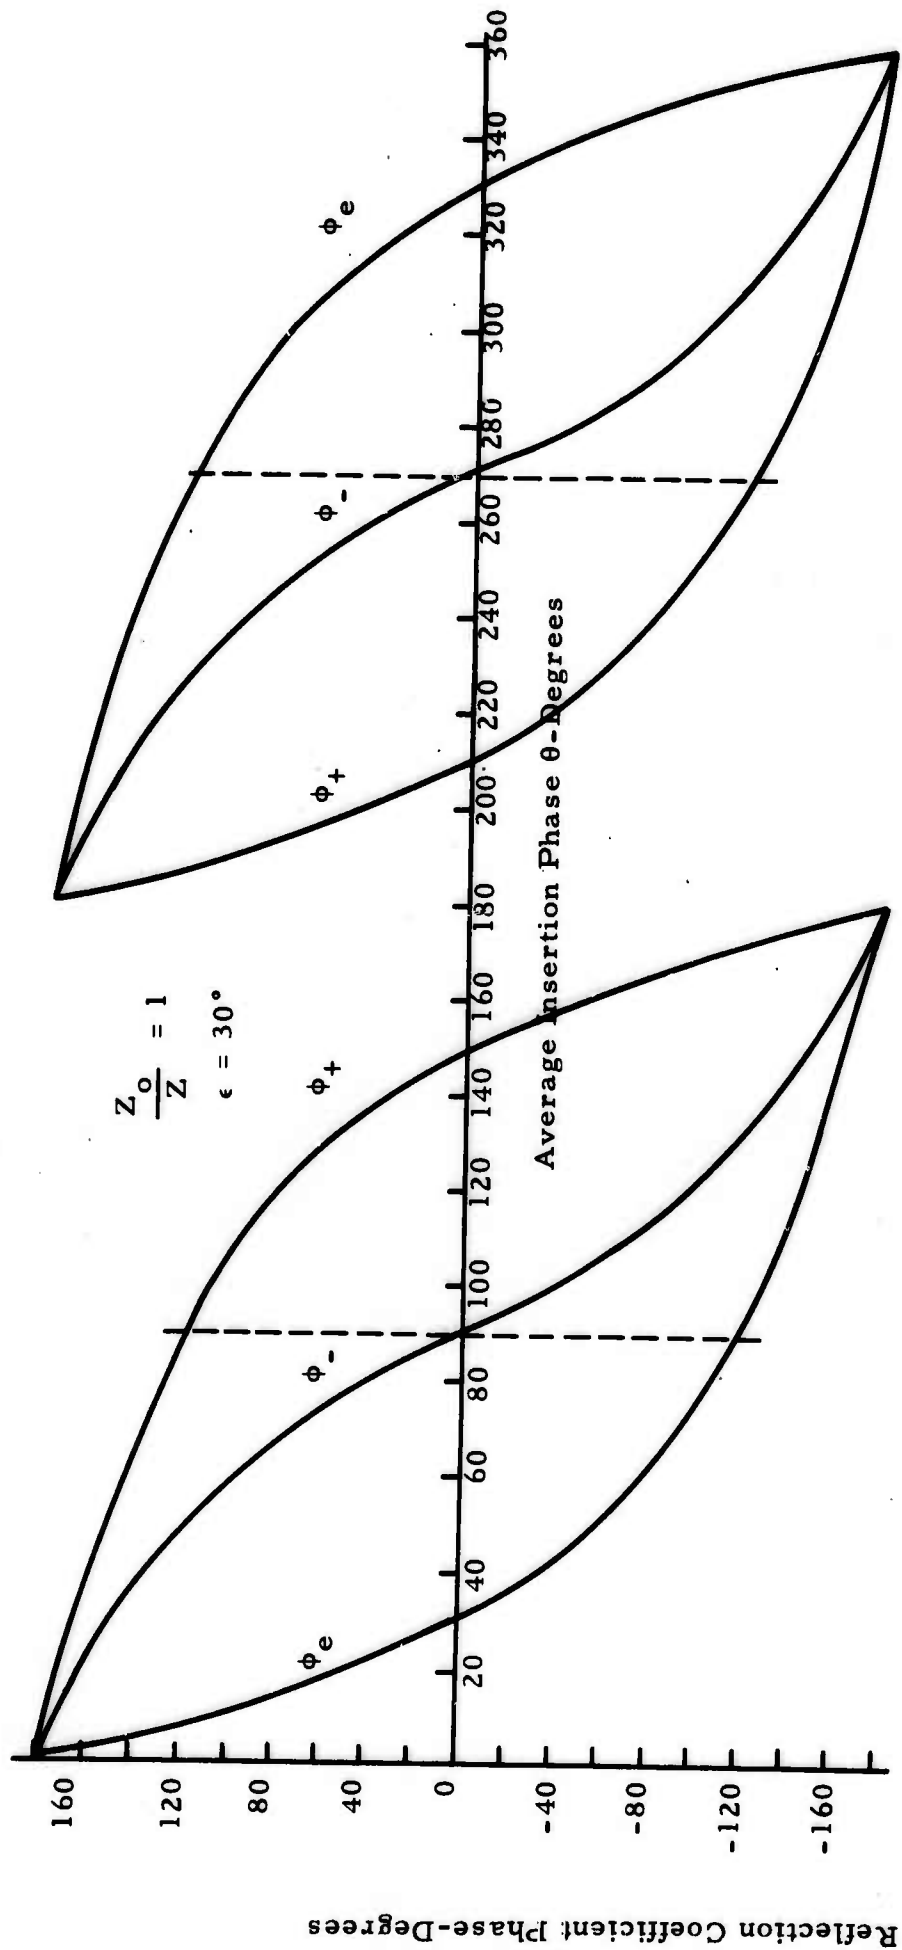
6

Figure 2. Non-Reciprocal Ring Circuit with Circulation at $\theta = 90°$ and $\theta = 270°$

After some manipulation the magnitude is

$$\left| \delta S_{31} \right| = \frac{1}{3} \left[\sum_{i=1}^{3} \left(\frac{d\phi_i}{d\omega} \right)^2 - \left(\frac{d\phi_1}{d\omega} \frac{d\phi_2}{d\omega} + \frac{d\phi_1}{d\omega} \frac{d\phi_3}{d\omega} + \frac{d\phi_2}{d\omega} \frac{d\phi_3}{d\omega} \right) \right]^{1/2} \left| \delta\omega \right|_{\omega_o} \quad (2\text{-}6)$$

It is informative to write the derivatives with respect to ω as

$$\frac{d\phi_i}{d\omega} = \frac{d\phi_i}{d\theta} \frac{d\theta}{d\omega} \qquad i = 1, 2, 3$$

$$= K_i \frac{d\theta}{d\omega}$$

where K_i is just the slope of the reflection coefficient in Figure 2. It may also be determined by taking the derivative of Equation (2-5).

$$K_1 = \frac{-4 \frac{Z_o}{Z} \left\{ 1 + \left[\frac{\cos\theta - \cos\epsilon}{\sin\theta} \right] \cot\theta \right\}}{1 + \left\{ \frac{2 Z_o}{Z} \left[\frac{\cos\theta + \sin(30+\epsilon)}{\sin\theta} \right] \right\}^2}$$

$$K_2 = \frac{-4 \frac{Z_o}{Z} \left\{ 1 + \left[\frac{\cos\theta + \sin(30+\epsilon)}{\sin\theta} \right] \cot\theta \right\}}{1 + \left\{ \frac{2 Z_o}{Z} \left[\frac{\cos\theta + \sin(30+\epsilon)}{\sin\theta} \right] \right\}^2} \qquad (2\text{-}7)$$

$$K_3 = \frac{-4 \frac{Z_o}{Z} \left\{ 1 + \left[\frac{\cos\theta + \sin(30-\epsilon)}{\sin\theta} \right] \cot\theta \right\}}{1 + \left\{ \frac{2 Z_o}{Z} \left[\frac{\cos\theta + \sin(30-\epsilon)}{\sin\theta} \right] \right\}^2}$$

For the circulation condition with 60° differential phase shift ($\epsilon = 30°$), $Z_o = 50$ ohms and the phase shifter an odd number of quarter wavelengths long ($\theta = (2n+1)\pi/2$)

$$K_1 = K_2 = -1 \qquad K_3 = -4$$

and Equation (2-6) becomes

$$\left| \delta S_{31} \right| = \left| \frac{d\theta}{d\omega} \right|_{\omega_o} \cdot \left| \delta\omega \right|$$

8

and the fractional bandwidth BW for a given isolation is

$$BW = 2 \left| \frac{\delta \omega}{\omega_o} \right| = \frac{2 \left| \delta S_{31} \right|}{\omega_o \left| \frac{d\theta}{d\omega} \right|_{\omega_o}} \tag{2-8}$$

The value of θ, the electrical length of the phase shifter, is determined by the percentage of interaction P in the phase shifter.

$$P = \frac{\text{non-reciprocal phase shift}}{\text{average insertion phase}}$$

Sixty degrees non-reciprocal phase shift is required and the lower the interaction the larger θ and hence $\left| \frac{d\theta}{d\omega} \right|$. Bandwidth is inversely proportional to this quantity.

9

3. CIRCULATOR DESIGN AND EVALUATION

A microstrip ring circulator was designed from the graph in Figure 2. The circulator is shown in Figure 3. The phase data for the five section meander line is plotted in Figure 4. Non reciprocal phase ($\Delta\theta$) greater than the required 60° was obtained. The impedance level of the ring was approximately 50 ohms and it had a 1 db insertion loss. The key to the dimensions on the chart is:

b = ground plane spacing

W_e = conductor width of uncoupled lines

W_c = conductor width of coupled lines

s = spacing between coupled lines

lc = length of coupled line sections

There were three frequencies in S-Band at which the device circulated. These were where the phase shifter was an odd number of quarter wavelengths long. A typical circulation characteristic is shown in Figure 5. The 20 db isolation bandwidths is 1-1/2 %.

Let us now examine the theoretical bandwidth using Equation (2-8). For a 20 db isolation bandwidth the formula is

$$BW = \frac{0.2}{\omega_o \left| \frac{d\theta}{d\omega} \right|_{\omega = \omega_o}}$$

From Figure 4, $\frac{d\theta}{dt} \approx 420°/GHz$. The circulation frequency fo is 2.4 GHz. The calculated bandwidth is approximately 1% or 24 MHz which is in good agreement with the experimental value of 36 MHz. The factors causing this narrow bandwidth are (1) the dispersion in the phase shifter and (2) the low interaction (non-reciprocal phase shift/average insertion phase). Both these factors increase $\frac{d\theta}{d\omega}$ and therefore the bandwidth.

Numerous other meander line configurations were designed and

10

tested. The coupling, the coupled line lengths, and the number of sections were all varied. No significant improvement in circulation bandwidth was obtained. Because of the large insertion phase required in the actual device, the ring circulator is a high Q narrow bandwidth device.
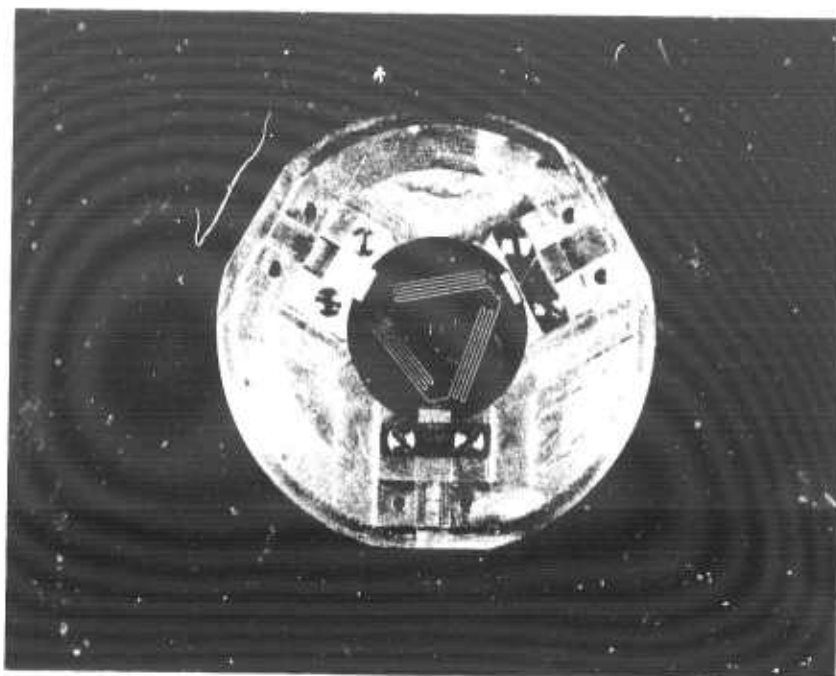
Figure 3. Microstrip Three-Port Ring Circulator with
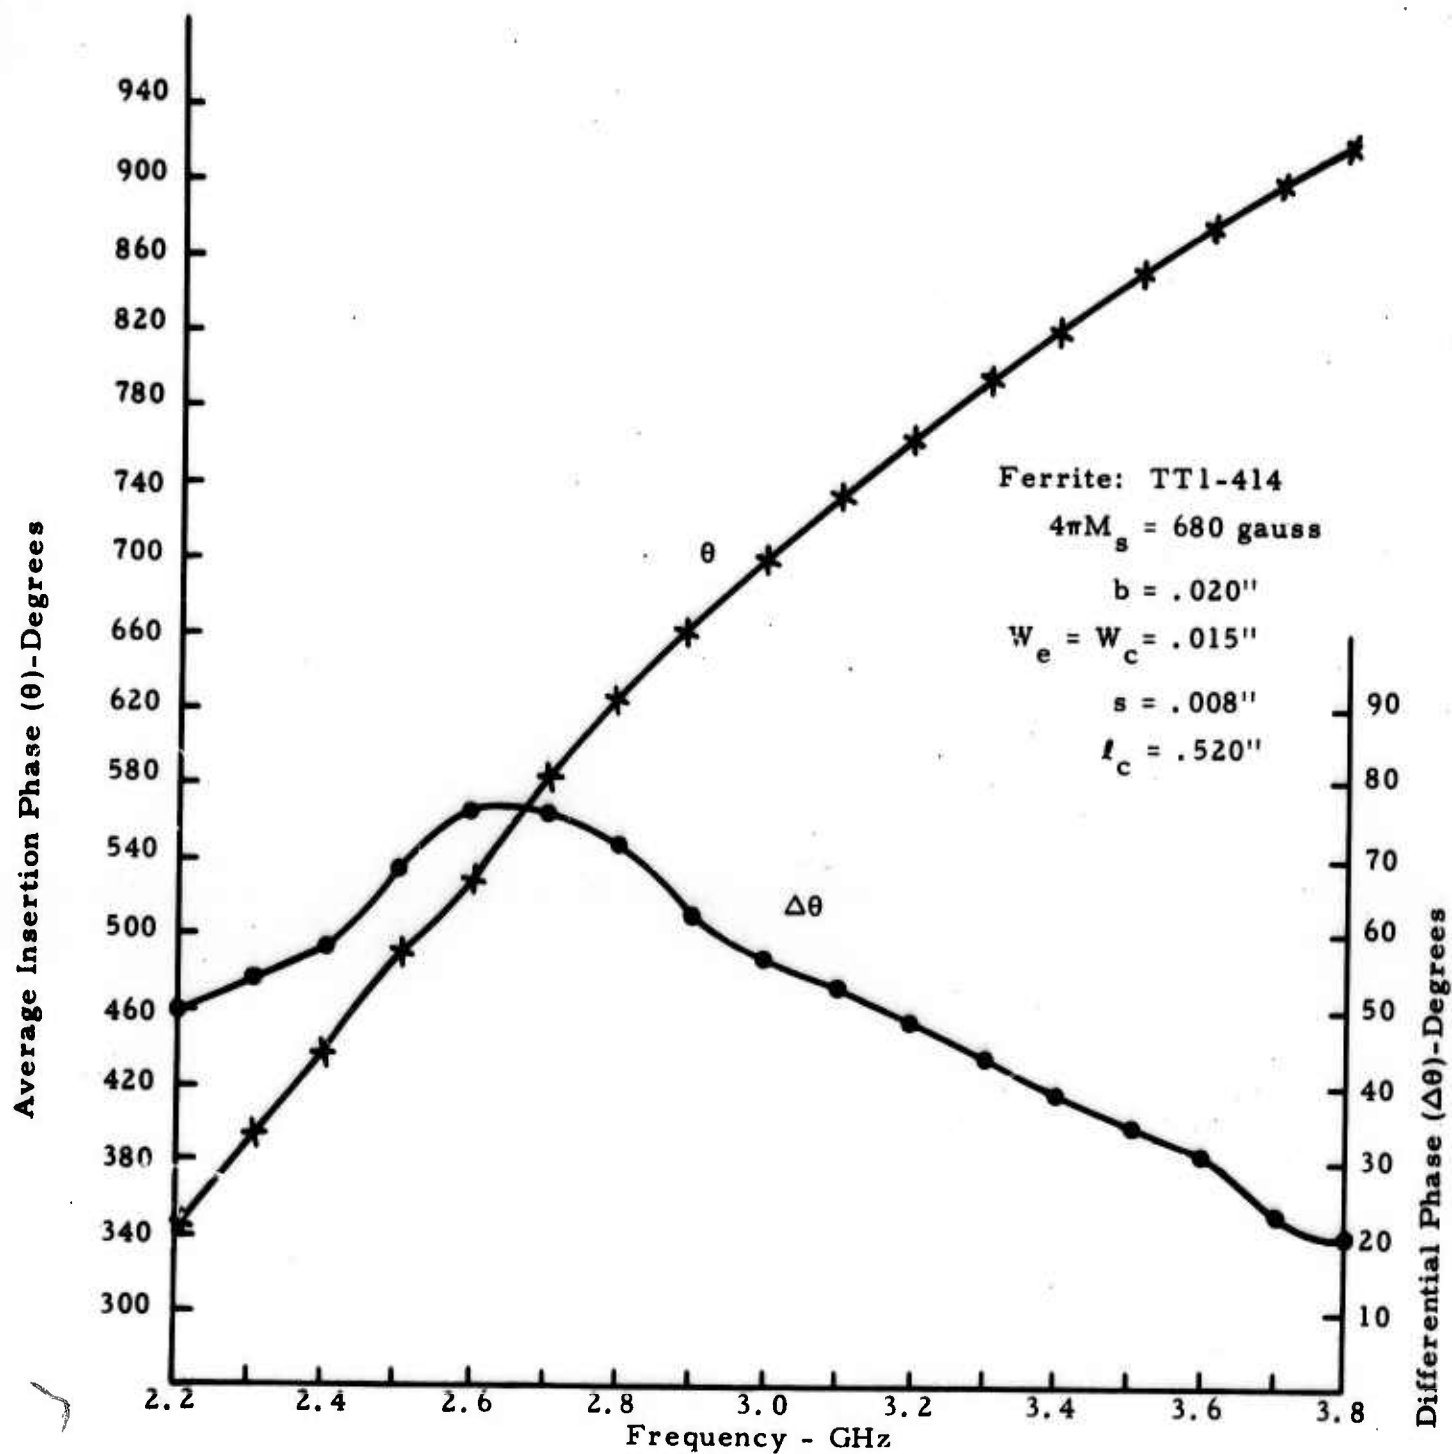Meander-Line Phase-Shifters

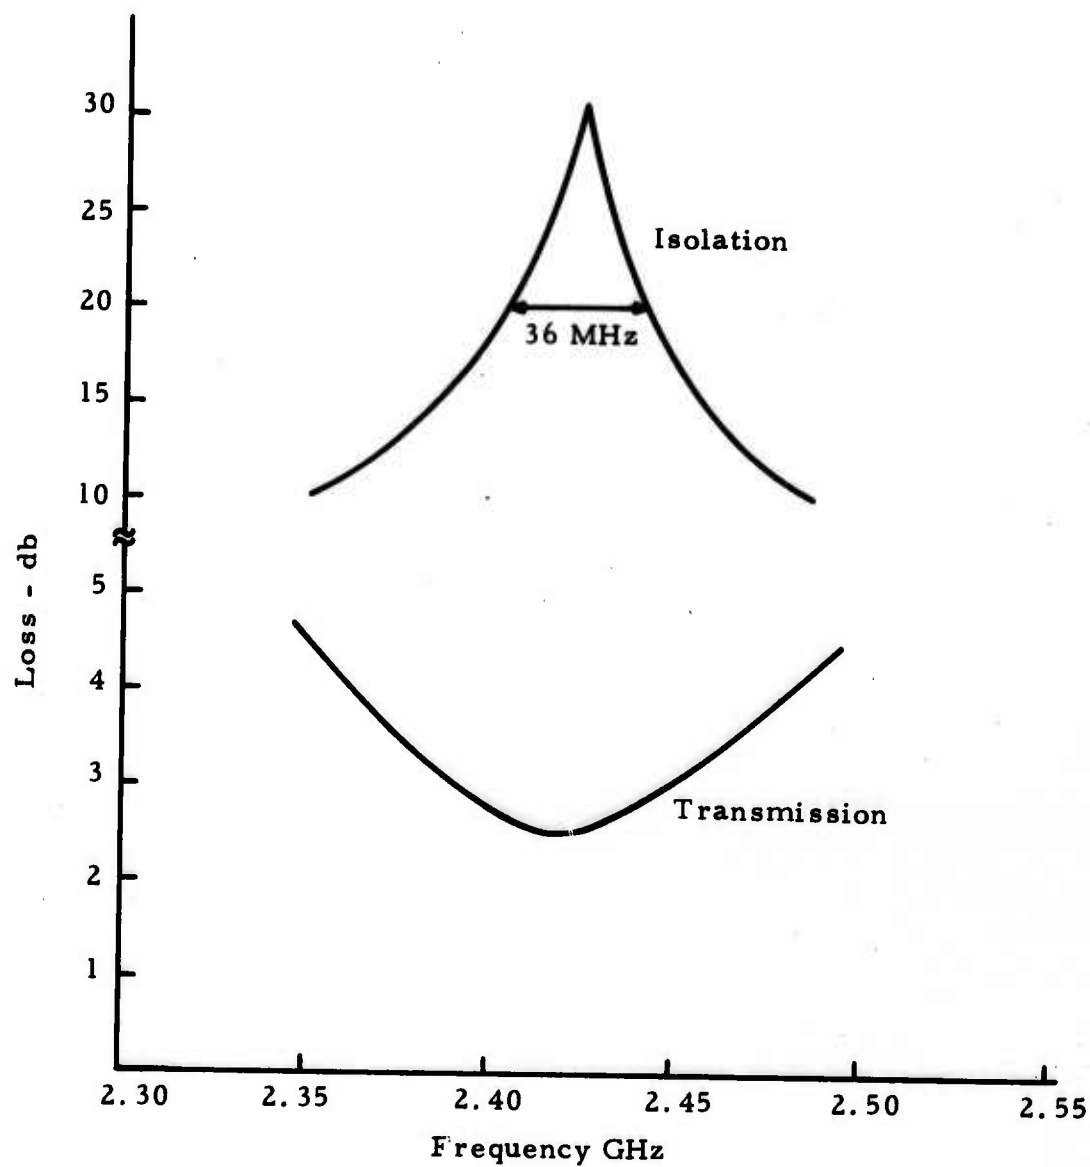Figure 4. Phase Characteristics for the 5-Line Meander Line
Phase-Shifter

13

Figure 5. Performance of 5-Line Meander Line Ring Circulator